


Product Code . DS-EE-11475

Power Factor Meter



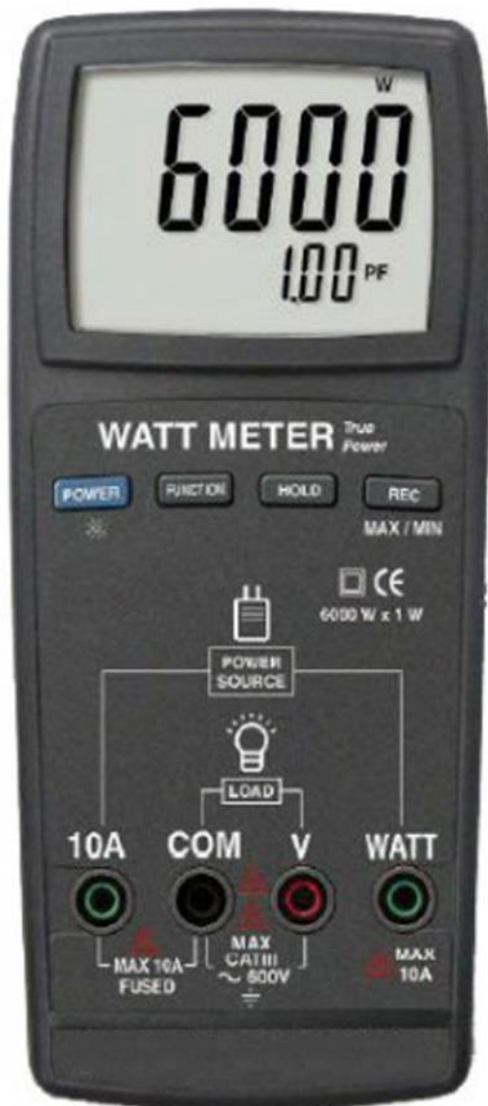

Description

Features :-

- Large dual LCD display with backlight.
- Full function auto range.
- Max./Min. Record.
- Data Hold.
- RS232 computer interface.
- Low battery indicator.

Technical Data :-

- Measurement: Power factor, Watt, ACV and ACA
- Watt (True power) Range: 6000W
- Accuracy: $\pm (1\% + 5W)$
- Resolution: 1W
- ACV (True RMS) Range: 600V
- Accuracy: $\pm (0.3\% + 0.3V)$, Resolution: 0.1V
- ACV Input Impedance: 10M?
- ACA (True RMS) Range: 10A
- Accuracy: $\pm (0.3\% + 0.03A)$, Resolution: 0.01A
- Power Factor Range: 1.00
- Accuracy: $\pm (1\% + 2d)$, Resolution: 0.01
- Display: Large LCD, 9999 reading
- Sampling Time: 1 sec.
- Memory record, recall and data hold function
- Full function auto range and automatic zero adjustment facility
- Built-in low battery indicator
- Accessories: Test lead, Battery and User manual

Didac Scientific Pvt. Ltd,
Martinfield Business Centre, 108 Martinfield, Welwyn Garden City , United Kingdom
Direct Contact Details  sales@didacscientific.co.uk
 www.didacscientific.co.uk/
